

Hydraulic Torque Wrench Pumps

LP Series

TorcPLUS®
durable bolting technologies

 **TÜVRheinland®**
Genau. Richtig.






- 700 bar working pressure
- Variable flow-rate piston pump
- TÜV Rheinland certified manufacturing
- CE certified and 2 years warranty
- 6 Lt tank capacity, compact and easy to carry
- Standard cable remote control
- Pressure safety valve
- Models to run 2 or 4 pieces of torque wrenches
- Oil cooling fan for continuous working
- Easily replaced quick couplers
- Robust cage for impact protection
- Wide technical support and spare part capability
- Trade Mark: TorcPLUS®

Code #	Pressure bar	Type Std / Auto	Tank Lt	Flowrates Lt/min	Power kW	Voltage V	Freq. Hz	Device* pcs	Weight kg
LP3-2	700	Standard	6	7-1,6-0,8	1,1	220	50	2	25
LP3-4	700	Standard	6	7-1,6-0,8	1,1	220	50	4	27
LP3-2A	700	Automatic	6	7-1,6-0,8	1,1	220	50	2	26
LP3-4A	700	Automatic	6	7-1,6-0,8	1,1	220	50	4	28

* Hydraulic torque wrench that one pump can run at the same time

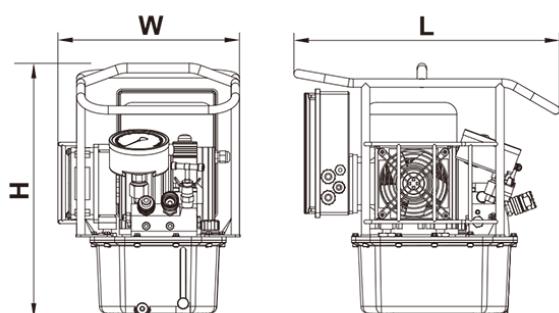

Code #	H mm	W mm	L mm
LP3-2	426	304	445
LP3-4	426	304	461
LP3-2A	426	304	445
LP3-4A	426	304	461

Complementary Equipment

The following complementary equipment can be purchased as a set together with pump or separately.



SQ Drive Torque Wrench



Cassette Torque Wrench



Twin Hose